

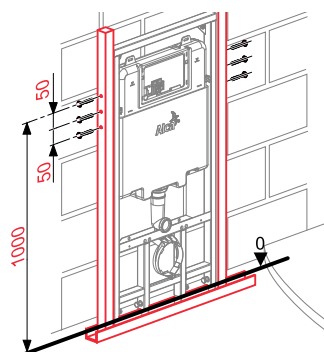
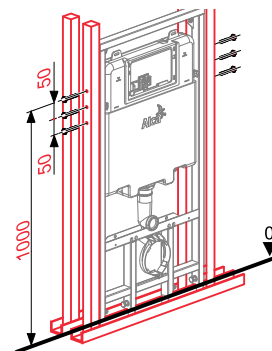










Figure 1 shows the technical drawing of the G1/2" valve assembly. The main view includes dimensions such as 20-60, 84, 470, 1000, 1175, 410 (+20/-10), 320, 135, 0-100, 230, 180, 212, 230, 180, 0-100, 220, max 10°, 33, 40, min 70, max 368, 295, min 183 - max 392, and Ø110. A warning triangle symbol is present near the 410 dimension. The side views are labeled 1, 2, 3, 4, 5, A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z.

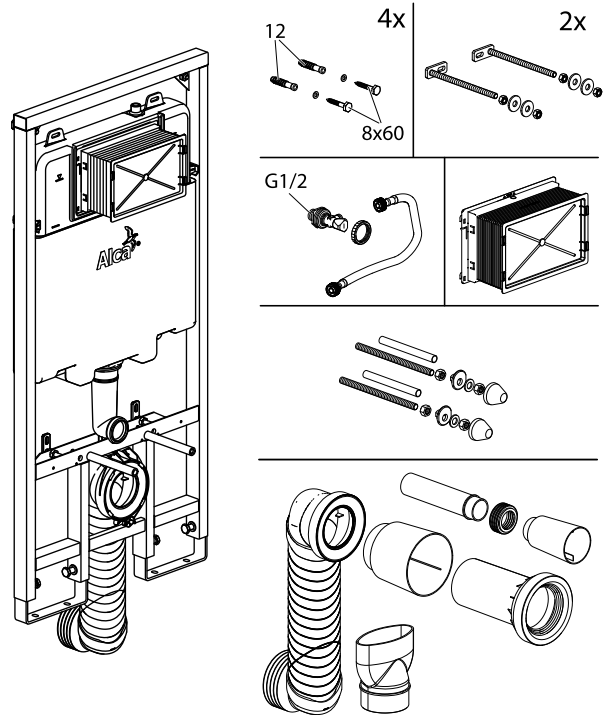


2

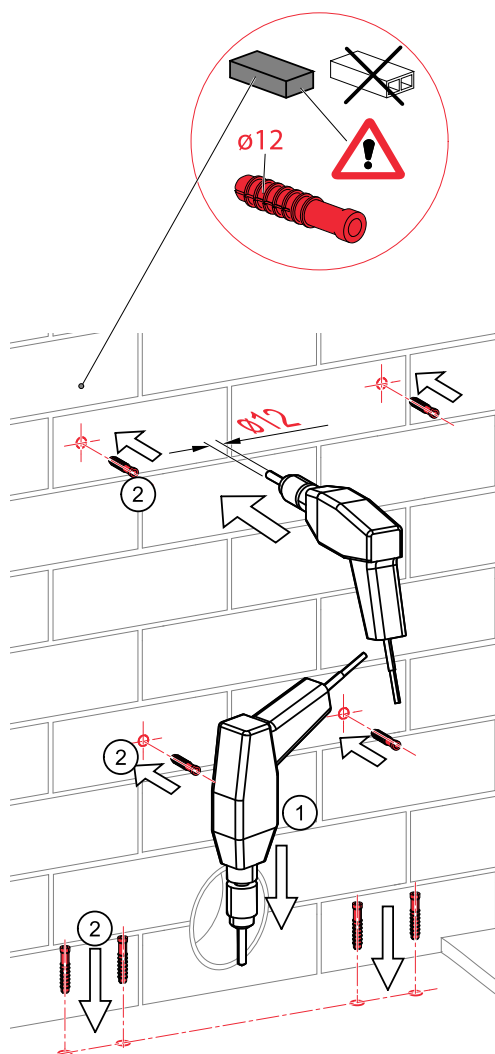


3

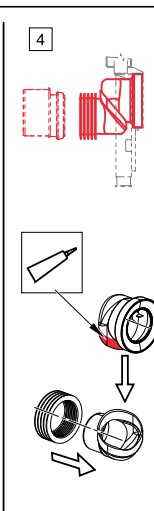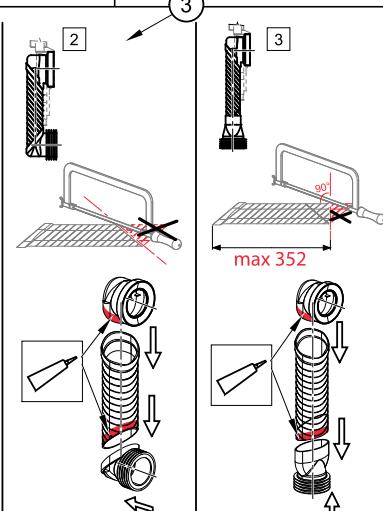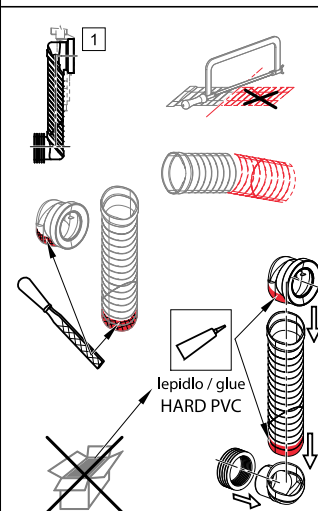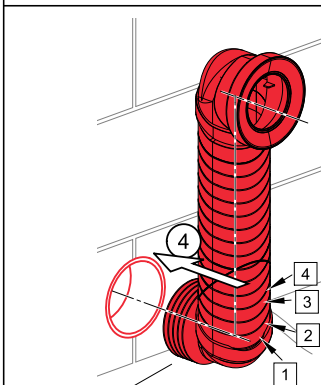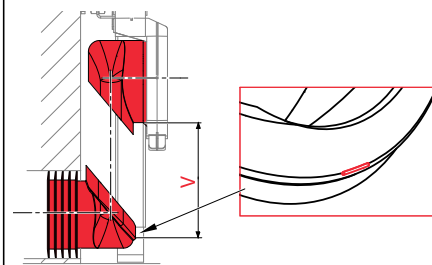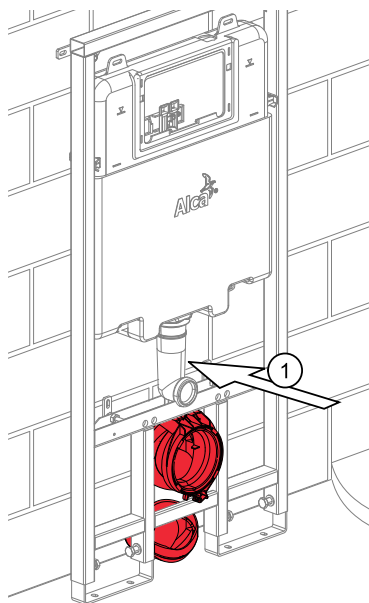


4

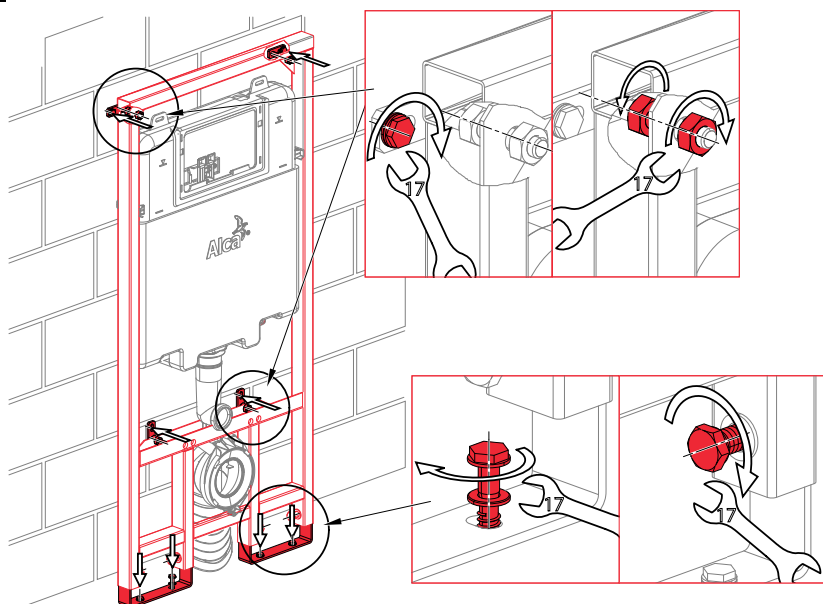






5

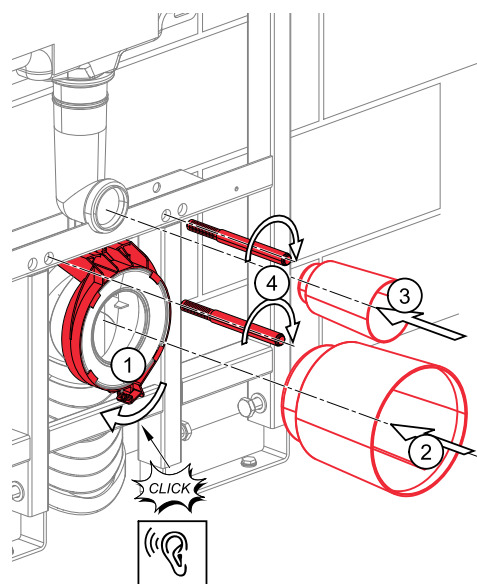


6

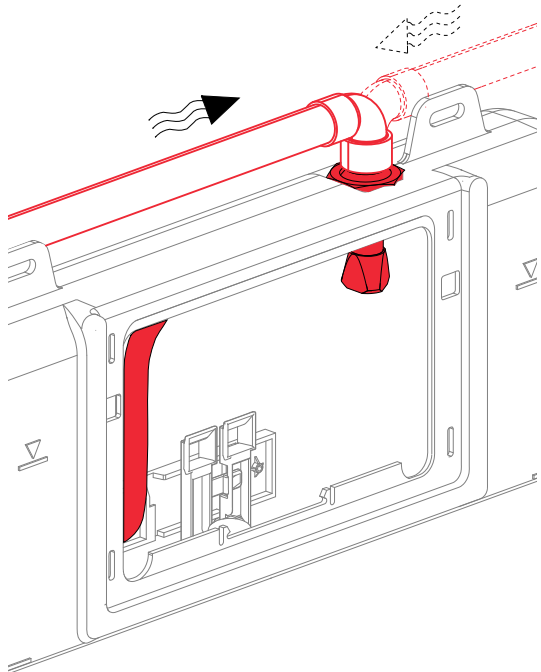


TEFLON

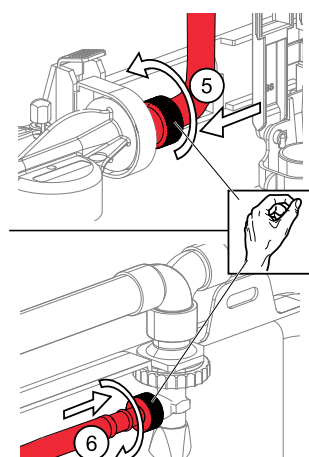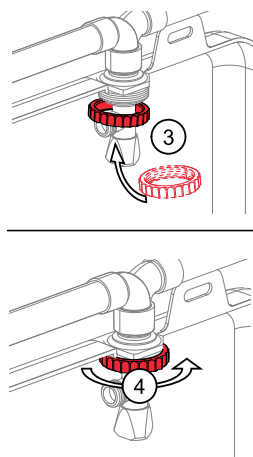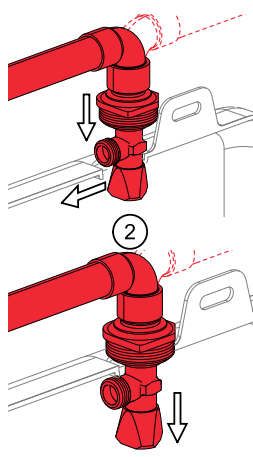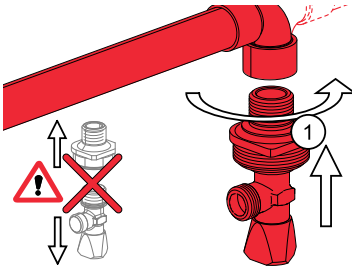


7

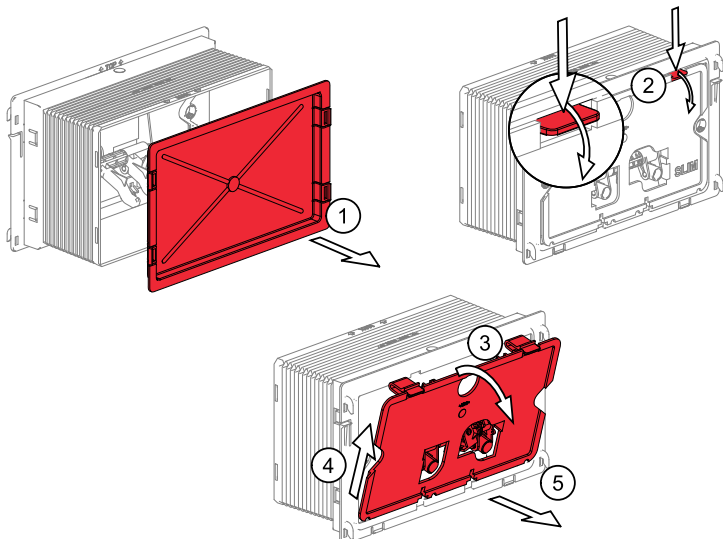

8

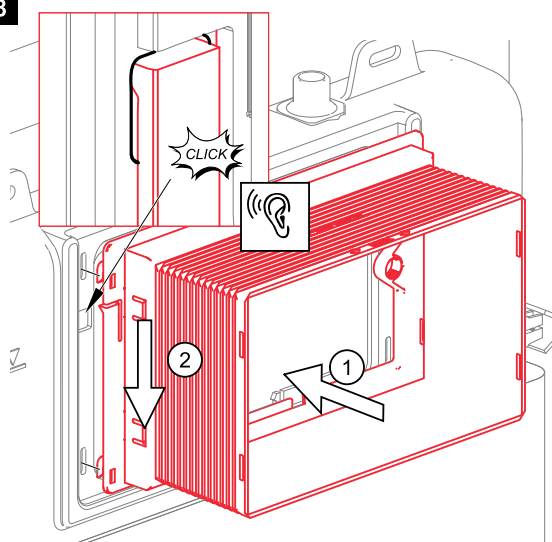

9

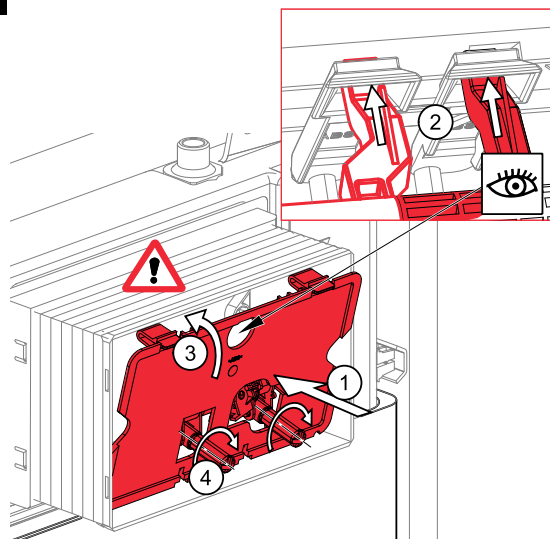

10

